


## Solar Street Light (SS-44)

SS-44	DESCRIPTIONS
Solar Panel	Material: 5W Multicrystalline silicon (tempered glass encapsulated) Life time: 15 years
Battery Group	9 x 1.2V/3.5Ah Ni-MH batteries Life time: 5-8 years
Controller	a. Switch on automatically with light sensor b. Switch off automatically with built-in timer (default: 8 hours) c. Battery over-current and over-discharge protection
Pole	a. Cast aluminum pole and plastic-coated b. Stainless hexangular screw for connection c. Clear glass or milky glass lampshade (optional)
Light Source	a. Super bright white 3W LED lamp (120 lumens) b. Luminance equivalent to one 30W incandescent lamp c. Life time: 100,000hrs
Working Conditions	a. Continuous working duration under cloudy weather: 3-5days b. Lighting range: 10 meters; Height: 200cm c. Ambient temperature: -40°C~+80°C
Packaging	a. Carton size: 107cm×50cm×52cm (3 units per carton) b. Light head and pole packed separately in inner boxes c. Carton gross weight: 24kg; Carton net weight: 22kg d. Carton Volume: 0.28m <sup>3</sup> ; Carton volume weight: 46kg e. Q'ty/20" FCL: 300pcs; Q'ty/40' FCL: 610pcs
Features	High capacity Ni-MH battery group is adopted. Function well under low temperature. Elegant in design and safe for use – no wire and low voltage. Convenient for self-assembling and environment friendly.

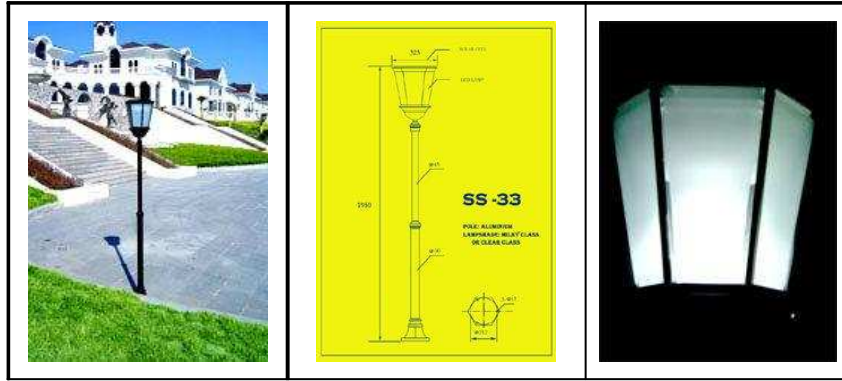

## Solar Street Light (SS-33)

SS-33	DESCRIPTIONS
Solar Panel	Material: 6W Multicrystalline silicon (tempered glass encapsulated) Life time: 15 years
Battery Group	6 x 1.2V/6Ah Ni-MH batteries Life time: 5-8 years
Controller	a. Switch on automatically with light sensor b. Switch off automatically with built-in timer (default: 8 hours) c. Battery over-current and over-discharge protection
Pole	a. Cast aluminum pole and plastic-coated b. Stainless hexangular screw for connection c. Clear glass or milky glass lampshade (optional)
Light Source	a. Super bright white 5W LED lamp (200 lumens) b. Luminance equivalent to one 50W incandescent lamp c. Life time: 100,000hrs
Working Conditions	a. Continuous working duration under cloudy weather: 3-5days b. Lighting range: 10 meters; Height: 200cm c. Ambient temperature: -40°C~+80°C
Packaging	a. Carton size: 104cm×50cm×52cm (3 units in one carton) b. Light head and pole packed separately in inner boxes c. Carton gross weight: 27kg; Carton net weight: 25 kg d. Carton volume: 0.27m <sup>3</sup> ; Carton volume weight: 45.1 kg e. Q'ty/20'FCL: 310pcs; Q'ty/40'FCL: 630pcs
Features	High capacity Ni-MH battery group is adopted. Function well under low temperature. Elegant in design and safe for use – no wire and low voltage. Convenient for self-assembling and environment friendly.